

NewART PVC windows

NewART – an economical and reliable choice for modern windows. This profile system with dual-gasket sealing offers a practical solution for those seeking the best balance between price and quality. It provides reliable thermal and acoustic insulation, helping to reduce heating costs and improve living comfort. The optimized construction maintains a slim frame design, allowing more natural light into the space and giving windows a sleek, modern appearance. Its robust structure makes it an excellent fit for both new homes and renovation projects.

Key advantages:


- **Cost-effective solution** – the optimal choice for those looking to save without compromising on quality.
- **More natural light** – slim frame and large glass area ensure abundant daylight.

A+ $U_w=0,85 \text{ W/m}^2\text{K}$

With a triple-glazed unit selected according to project requirements

B $U_w=1,3 \text{ W/m}^2\text{K}$

With a double-glazed unit selected according to project requirements

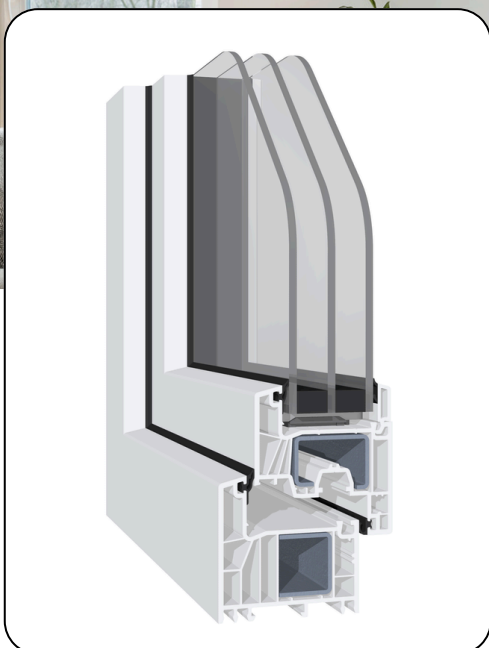

The NewART system can be used to produce:

- | Windows
- | Balcony doors
- | Terrace doors
- | Exterior doors
- | PSK sliding doors
- | Interior doors

Technical specifications

	Standard configuration	Optional features
Profile	SALAMANDER proEvolution 72 AD	-
Colour	White	From the Standard, Premium, and Premium+ colour palettes (coloured on one or both sides)
Frame shape	Flat shape	-
Glazing beads	Flat shape	-
Gaskets	Black gaskets with increased elasticity	-
Profile Width	72 mm	-
Number of chambers in frame/sash	5/5	-
Reinforcement	Galvanized Steel	-
Glazing	<ul style="list-style-type: none"> Double glazing unit (24 mm) – with one low-emissivity glass pane Triple glazing unit (44 mm) – with two low-emissivity glass panes Aluminum spacer for glass unit 	<ul style="list-style-type: none"> Other double or triple glazing units with patterned, tinted, reflective, solar-control, self-cleaning, safety, sound-insulating, or frosted glass Decorative muntins placed inside the glazing unit or on the exterior surface of the glass Various thermal spacers for glass units
Sealing	Double (AD) compression seal system	-
Hardware	<p>Basic security hardware by Siegenia Titan:</p> <ul style="list-style-type: none"> Lower corner anti-burglary protection (on the handle side) Protected with silver-colored anti-corrosion coating “Titan-Silber” Hinges with Teflon bushings ensuring smooth and gentle window opening Equipped with white hinge cover caps 	<ul style="list-style-type: none"> Multi-purpose hardware accessories, such as opening restrictors, handle operation limiters, and stepwise micro-ventilation Concealed hinges
Ventilation	Micro-ventilation	Ventilation accessories – horizontal air vents integrated into the glazing unit or milled into the window frames, and multi-stage micro-ventilation.
Resistance class	Standard anti-lift protection at one sash corner	Up to resistance class RC2
Security	-	<ul style="list-style-type: none"> Aluminum threshold protection for balcony doors Handle misuse prevention device for tilted window sashes Handle misuse prevention device for open balcony door sashes
Handles	ALU, white colour	Exterior handles and latches for balcony doors, safety handles, cover caps, and child-safety handle accessories.